

The Neostart 620 maintains batteries even deeply discharged battery.

CHARGER FUNCTION

The Neostart 620 charges 12V and 24V lead acid batteries from **20Ah to 1350Ah**.

It is a traditional charger. Charging must be monitored.

STARTER FUNCTION

The Neostart 620 can start vehicles with 12V or 24V lead acid batteries from **45Ah to 200Ah**.

A pre-charge may be necessary to supply enough energy to start the vehicle.

High Power traditional starter and charger cable of instantaneous start even with deeply discharged battery.

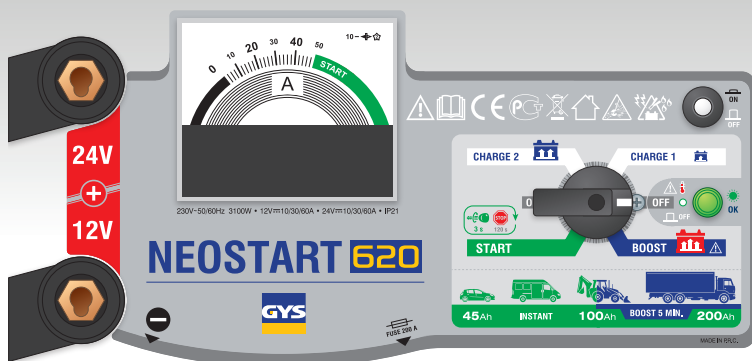
- The ProStart 620 is protected against short circuits, polarity inversion and mains overvoltage.
- On board storage for cables and clamps
- Integrated wheels for portability
- Cables Ø 16 mm² (length: red - 2m, black - 1.8m).
- Brass clamps
- Externally visible and easily accessible fuse
- Large ammeter









P. max charge = 1600W

P. max start = 10 kW

EASY TO USE CONTROL PANEL



 - EN 60335-2-29

50/60hz	I ₁			MIN. Ah	MAX. Ah		EFFICACE / RMS	MOYEN / AVERAGE	POS. MANUAL	START			IP		
										A 1V/C	A 0V/C				
230V	16A	3100W	12-24V	20	>1350 Ah	3	90A	60A	•	360A	620A	200A	IP 21	47x32x27 cm	24 kg